


PRODUCT PHOTOS




ITEM	SPECIFICATION		
Clear-Span Width	15m	18m	20m
Eave Height	4m		
Ridge Height	6.63m	7.12m	7.44m
Roof Pitch	18°		
Bay Distance	5m		
Longest Component	10.5m	11m	11.5m
Minimum Tent Length	15m		
Maximum Tent Length	No Limit		
Main Profile	203 x 112 x 4mm (4-channel)		
Max Allowed Windspeed	80km/hr 0.5kn/m2		
Eave Connection	Hot-dip galvanized twin steel plate		
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)		
Cover Material	PVC, flame retardant to DIN 4102 B1,M2. Standard white 750gsm, Printed Fabric 580gsm		
Engineer Certification	Engineer Structural Certificate, Fire Action Analysis		


TECHNICAL DIAGRAMS

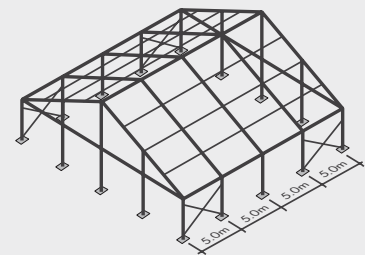


Type:
15m



Type:
18m

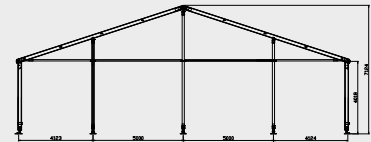

Type:
20m

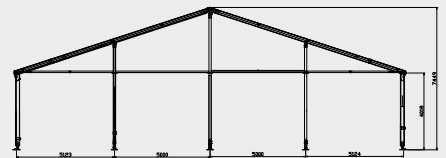

AVAILABLE COLOURS

PVC

Imported Belgian 100% PVC



White
CMYK - 00000 Pantone - White

PVC

Digital



Full colour printing (unprinted fabric)
Pantone - Colour matching

ADDITIONAL FEATURES

The Extreme Crest range offers the largest marquees in the world. The engineering involved with the Crest is first class. The high 4m eave facilitate numerous wall and layout choices.

With widths ranging from 10m to 60m the Crest can fulfil most customer's needs.

The inherent quality means many years of service. Ideal for military, industrial, mining applications.

Accessories

PVC Window Sidewalls, Rain Gutter, Lining & Curtains, Glass Door Units, Hard Walling System, Glass Walling System, Transparent PVC, Cover & Sidewall, Flooring Systems, Weight Plate

TECHNICAL DIAGRAMS

Framework Main profile dimensions and use

