


PRODUCT PHOTOS



| ITEM | SPECIFICATION | | | |
|------------------------|--|-------|------|------|
| Clear-Span Width | 6m | 8m | 9m | 10m |
| Eave Height | 2.5m | | | |
| Ridge Height | 3.8m | 3.95m | 4.2m | 4.3m |
| Roof Pitch | 20° | | | |
| Bay Distance | 3m | | | |
| Longest Component | 3.6m | 4.2m | 4.8m | 5.4m |
| Minimum Tent Length | 6m | | | |
| Maximum Tent Length | No Limit | | | |
| Roof Fixing | Bar Tensioning | | | |
| Main Profile | 100 x 48 x 3mm (4-channel) | | | |
| Max Allowed Windspeed | 80km/hr 0.3kn/m2 | | | |
| Eave Connection | Hot-dip galvanized steel insert | | | |
| Framework Material | Hard pressed extruded aluminium 6061/T6 (13HW) | | | |
| Cover Material | PVC, flame retardant to DIN 4102 B1,M2. Standard white 750gsm, Printed Fabric 580gsm | | | |
| Engineer Certification | Engineer Structural Certificate, Resistance of Fabrics to Water Penetration Test, Ultra Violet Protection Test, Fire Action Analysis | | | |

AVAILABLE COLOURS

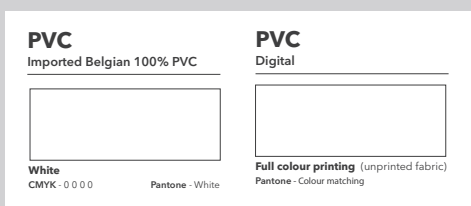


ADDITIONAL FEATURES

The Deluxe mirrors the traditional functionality of the Standard. The key enhancements are a sturdy 100x 48 x 3mm framework and a new mounting for the sidewalls that improves weatherproofing and a roof tension system. The larger frame profile allows the Deluxe to extend to 10m clearspan with 3m wide bays. The Deluxe offers a robust design in an attractive, modern package.


Accessories

PVC Window Sidewalls, Rain Gutter, Lining & Curtains, Glass Door Units, Hard Walling System, Glass Walling System, Transparent PVC, Cover & Sidewall, Flooring Systems, Weight Plate


TECHNICAL DIAGRAMS

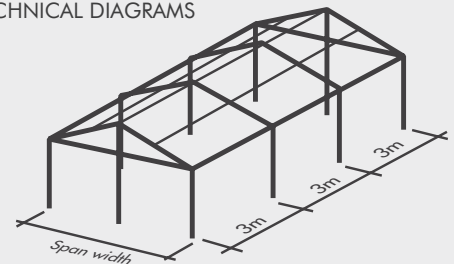


Type:
Span 6m




Type:
Span 8m



Type:
Span 9m

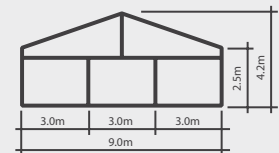


Type:
Span 10m

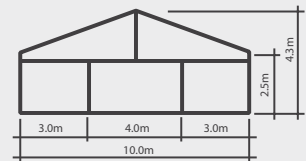

TECHNICAL DIAGRAMS

Framework Main profile dimensions and use

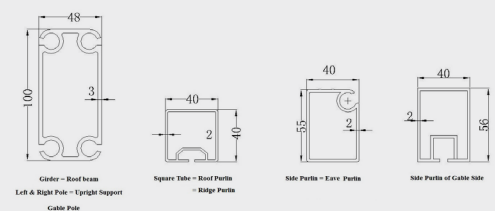

100mm x 48mm x 3mm