


PRODUCT PHOTOS




ITEM	SPECIFICATION	
Clear-Span Width	6m	8m
Eave Height	2.5m	
Ridge Height	3.8m	3.95m
Roof Pitch	20°	
Bay Distance	3m	
Longest Component	3.6m	4.2m
Minimum Tent Length	6m	
Maximum Tent Length	No Limit	
Main Profile	82 x 48 x 3mm (2-channel)	
Max Allowed Windspeed	80km/hr 0.3kn/m2	
Eave Connection	Hot-dip galvanized steel insert	
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)	
Cover Material	PVC, flame retardant to DIN 4102 B1,M2. Standard white 750gsm, Printed Fabric 580gsm	
Engineer Certification	Engineer Structural Certificate, Resistance of Fabrics to Water Penetration Test, Ultra Violet Protection Test, Fire Action Analysis	


TECHNICAL DIAGRAMS

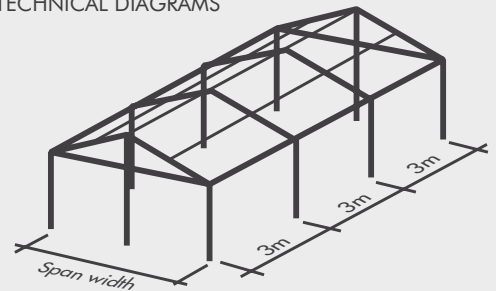

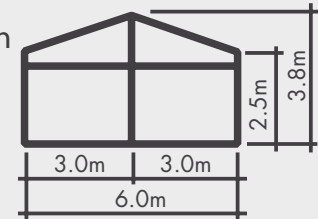

Type:
6m Span

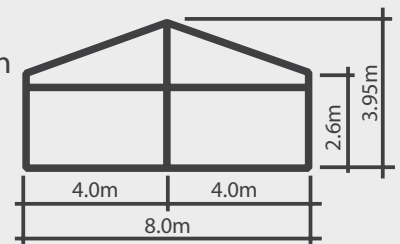

Type:
8m Span



AVAILABLE COLOURS

<p>PVC Imported Belgian 100% PVC</p>  <p>White CMTK - 0000 Pantone - White</p>	<p>PVC Digital</p>  <p>Full colour printing (unprinted fabric) Pantone - Colour matching</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

ADDITIONAL FEATURES

The Function Standard 2 is the start for our professional 3m bay event range. The Function Standard 2 offers popular clear-span widths of 6m and 8m with an eave height 2.5m. The Event Tent series are available with a complete range of accessories including sidewalls with clear windows, roof lining glass wall & door systems ABS solid walling system & flooring system.

Accessories
PVC Window Sidewalls, Rain Gutter, Lining & Curtains, Glass Door Units, Hard Walling System, Glass Walling System, Transparent PVC, Cover & Sidewall, Flooring Systems, Weight Plate

TECHNICAL DIAGRAMS

Framework Main profile dimensions and use

