


PRODUCT PHOTOS




ITEM	SPECIFICATION		
Clear-Span Width	8m	10m	12m
Eave Height	3.0m		
Ridge Height	4.45m	4.8m	5.2m
Roof Pitch	20°		
Bay Distance	5m		
Longest Component	4.2m	5.4m	6.4m
Minimum Tent Length	10m		
Roof Fixing	Bar Tensioning		
Main Profile	122 x 68 x 3mm (4-channel)		
Max Allowed Windspeed	80km/hr 0.3kn/m2		
Eave Connection	Hot-dip galvanized steel insert		
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)		
Cover Material	PVC, flame retardant to DIN 4102 B1,M2. Standard white 750gsm, Printed Fabric 580gsm		
Engineer Certification	Engineer Structural Certificate, Fire Action Analysis		


TECHNICAL DIAGRAMS

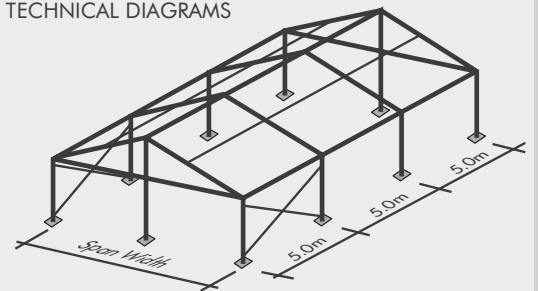


Type:
8m Span



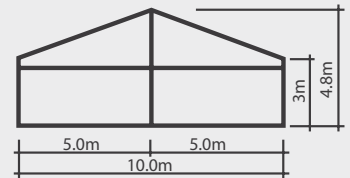

Type:
10m Span

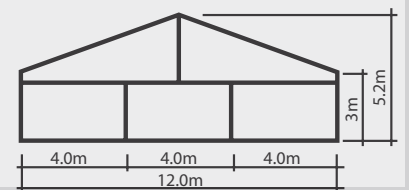

Type:
12m Span



AVAILABLE COLOURS

<p>PVC Imported Belgian 100% PVC</p>  <p>White CMTK - 0000 Pantone - White</p>	<p>PVC Digital</p>  <p>Full colour printing (unprinted fabric) Pantone - Colour matching</p>
--	--

ADDITIONAL FEATURES

The Event Standard 2 is the start for our professional 5m bay event range. The Event Standard 2 offers popular clear-span widths of 8m, 10m and 12m with an eave height 3m. The Event Tent series are available with a complete range of accessories including sidewalls with clear windows, roof lining glass wall & door systems ABS solid walling system & flooring system.

Accessories
PVC Window Sidewalls, Rain Gutter, Lining & Curtains, Glass Door Units, Hard Walling System, Glass Walling System, Transparent PVC, Cover & Sidewall, Flooring Systems, Weight Plate

TECHNICAL DIAGRAMS

Framework Main profile dimensions and use

